

INSTRUCTION MANUAL

2-WIRE PROGRAMMABLE TRANSMITTER

5333A



Contents

Application	2
Technical characteristics	2
Mounting / installation	2
Electrical specifications	3
Connections	4
Programming	4
Dimensions	4
Mounting of sensor wires	4



Read the recommendations and warnings in this manual before the instrument is installed. For personal safety, optimal use and maintenance, these instructions should be studied carefully.

Manufactured by:

 **KLAY-INSTRUMENTS B.V.**

www.klay.nl

Nijverheidsweg 5
P.O. Box 13
Tel: +31-521-591550
Fax: +31 -521-592046

7991 CZ DWINGELOO
7990 AA DWINGELOO
The Netherlands
E-mail: info@klay.nl

2-WIRE PROGRAMMABLE TRANSMITTER - KLAY 5333A

- RTD or Ohm input
- High measurement accuracy
- 3-wire connection
- Programmable sensor error value
- For DIN form B sensor head mounting

Application:


- Linearized temperature measurement with Pt100...Pt1000 or Ni100...Ni1000 sensor.
- Conversion of linear resistance variation to a standard analogue current signal, for instance from valves or O ohm level sensors.

Technical characteristics:

- Within a few seconds the user can program KLAY 5333A to measure temperatures within all RTD ranges defined by the norms.
- The RTD and resistance inputs have cable compensation for 3-wire connection.

Mounting / installation:

- For DIN form B sensor head mounting or mounting on a DIN rail with a special fitting.

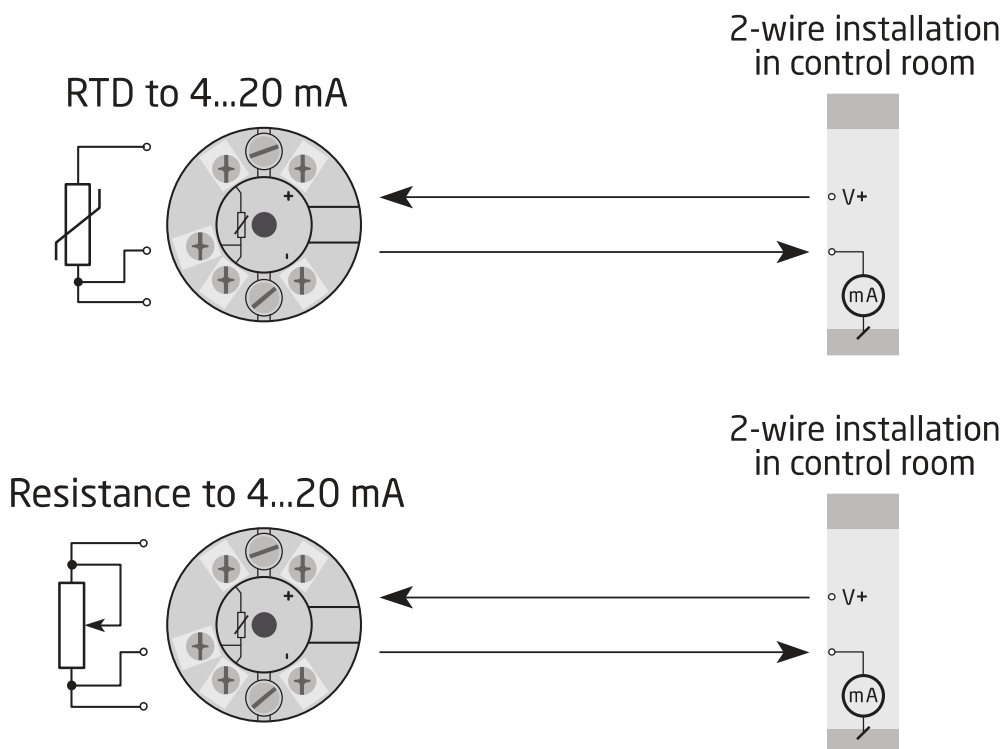

Electrical specifications:

Specifications range:

-40°C to +85°C

Common specifications:

Supply voltage, DC	
Standard	8...35 V
Internal consumption	25 mW...0.8 W
Voltage drop	8 VDC
Warm-up time	5 min.
Communications interface	Loop Link
Signal / noise ratio	Min. 60 dB
Response time (programmable)	0.33...60 s
Signal dynamics, input	19 bit
Signal dynamics, output	16 bit
Calibration temperature	20...28°C
Accuracy	≤ 0.1% of span
Effect of supply voltage variation	≤ 0,005% of span / VDC
Vibration	IEC 60068-2-6 Test FC
Lloyd's specification no. 1	4 g / 2...100 Hz
Max. wire size	1 x 1.5 mm ² stranded wire
Humidity	< 95% RH (non-cond.)
Dimensions	Ø 44 x 20.2 mm
Tightness (enclosure / terminal)	IP68 / IP00
Weight	50 g

Electrical specifications, input:

RTD and linear resistance input:

RTD type	Min. value	Max. value	Min. span	Standard
Pt100	-200°C	+850°C	25°C	IEC 60751
Ni100	-60°C	+250°C	25°C	DIN 43760
Lin. R	0 ^	10000 ^	30 ^	----

Output:

Current output:

Signal range	4...20 mA
Min. signal range	16 mA
Updating time	135 ms
Load resistance	≤ (Vsupply- 8) / 0.023 [Ω]
Load stability	< ±0.01% of span / 100 Ω

Sensor error detection:

Programmable	3.5...23 mA
NAMUR NE43 Upscale	23 mA
NAMUR NE43 Downscale	3.5 mA

Marine Approval:


Det Norske Veritas, Ships & Offshore Standard for Certification No. 2.4

Observed authority requirements:Standard:


EMC 2004/108/EC

Emission and immunity EN 61326

Connections:

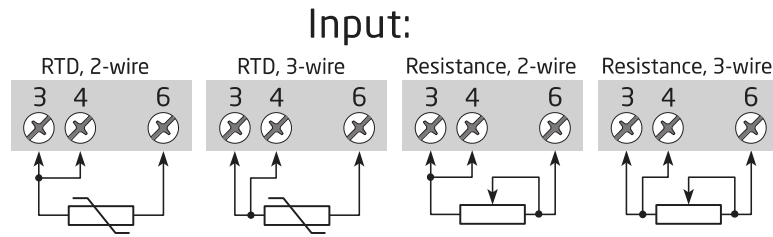


Output:





Programming tools: Loop Link and software "KLAY 8444" (option):

- Loop Link is a communications interface that is needed for programming KLAY 5333A.
- For programming please refer to the drawing below and the help functions in KLAY 8444.

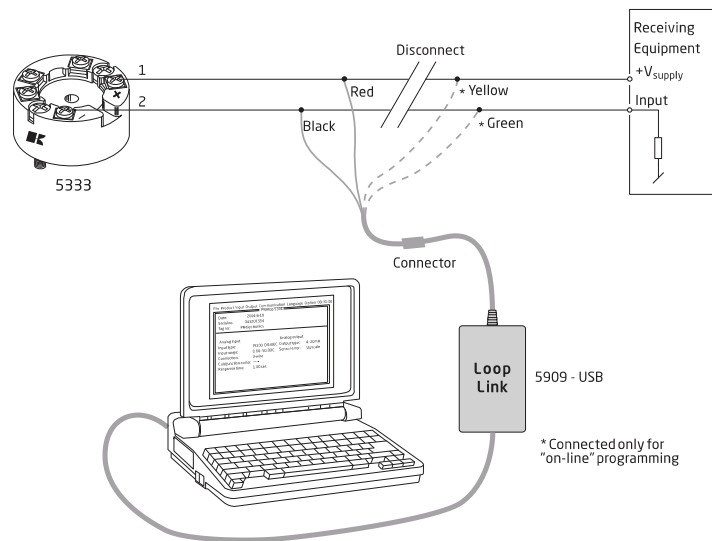

Mechanical specifications:



Mounting of sensor wires:

