



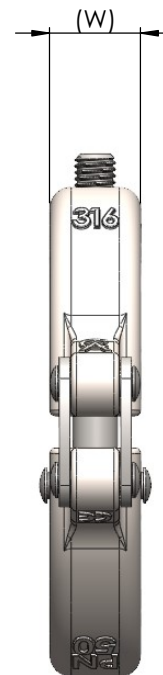

'SAFETY' TO BE LASER MARKED ON EACH HALF OF THE CLAMP IN BOLD LETTERING

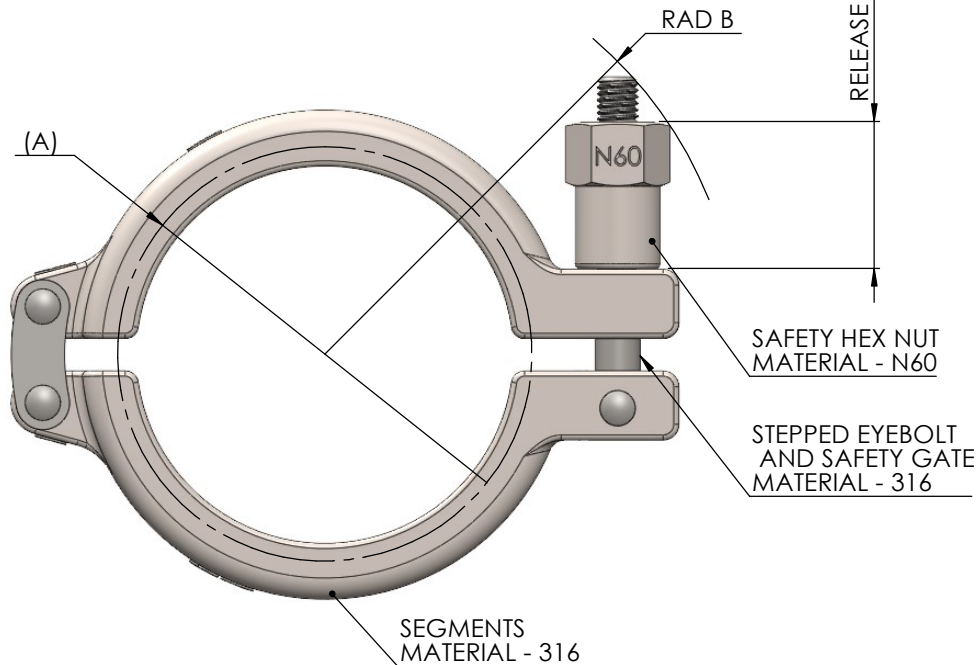

CLAMP SIZE	PART CODE	FLANGE (A)	RAD (B)	LENGTH (C)	WIDTH (W)	RELEASE ROT.	MASS (kg)
0.5"-0.75"	C005.6.SAFX N60	25.4	53	65	17	9	0.14
DN10/15/20	CD10.6.SAFX N60	34	57	75	17	10	0.16
1"-1.5"	C010.6.SAFX N60	50.5	72	92	17	10	0.24
2"	C020.6.SAFX N60	64	83	113	17	10	0.32
2.5"	C025.6.SAFX N60	77.5	90	130	17	10	0.37
3"	C030.6.SAFX N60	91	95	140	17	10	0.43
3.5"	C035.6.SAFX N60	106	100	155	17	10	0.43
4"	C040.6.SAFX N60	119	109	175	17	10	0.56
6"	C060.6.SAFX N60	167	133	247	24	10	1.47

- NOTES:
1. MAXIMUM ASSEMBLY TORQUE (HEXNUT) - 20Nm
  2. ASSEMBLY TORQUE WILL DEPEND ON GASKET MATERIAL USED

					TITLE: SAFEX CLAMP SPECIFICATION - N60 HEX NUTS		
					PROJECT: C0128	DWG No: 010	REV: .
NAME	SIGNATURE	DATE	MATERIAL:	THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ADVANCED COUPLINGS LIMITED. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ADVANCED COUPLINGS LIMITED IS PROHIBITED.			
DRAWN	W.Orr	05/06/2020	SEE NOTES				
CHK'D	J. Kendrick	05/06/2020					
APP'VD			WEIGHT: SEE TABLE	SCALE: 1:1	SHEET 8 OF 8	BORDER A3	