


Pneumatically Operated Valve DN 15 - 50 mm (3/4" - 2 1/2")



Cf. 4, 5 & 6

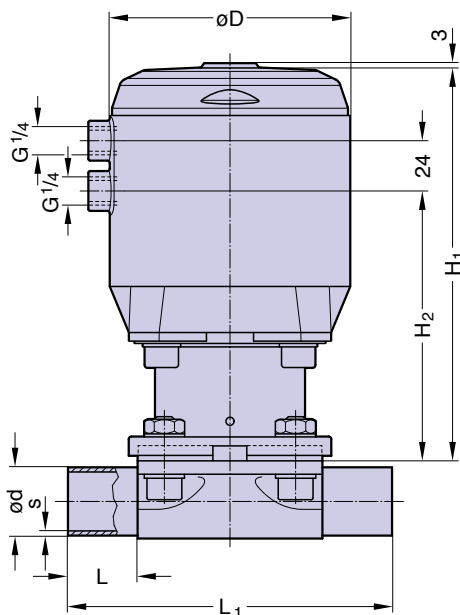

Butt weld ends
MA 25 - 50
Fold out page 21

Features

- Plastic piston actuator with stainless steel distance piece
- Compact design
- Control air connection in flow direction
- CDSA sealing concept, see page 32
- Flexible diaphragm suspension
- Encapsulated diaphragm

Optional

- Available with a wide range of control equipment and accessories see page 132 to 139, also for retrofitting
- Control air connection 90° to flow direction

Technical Data

- Control function (Cf.): Pneumatically operated
 Fail safe close (NC): Cf. 1 & 4
 Fail safe open (NO): Cf. 2 & 5
 Double acting (DA): Cf. 3 & 6
 At control function NO/DA higher control pressure than required may affect the lifetime of the working diaphragm.
- Direction
 Control connection: At Cf. 4, 5 & 6, in flow direction, standard
 At Cf. 1, 2 & 3, 90° to flow direction
- Max. working pressure: Unidirectional (delta p = 100%)
 EPDM Diaphragm 10 bar (150 psi)
 PTFE Diaphragm 8 bar (115 psi)
- Higher working pressure may be achieved with different actuator. Please consult a SED factory representative for working pressure above the indicated maximum.
- Max. working temperature: 160°C (320°F) dependent on application
- Control pressure:
 Cf. 1 & 4 4,5 - 7 bar (65 - 100 psi)
 Cf. 2, 3, 5 & 6 4 - 5 bar (60 - 72 psi)
- Diaphragm material: EPDM or PTFE
 Valve body material: Forged 1.4435/ 316 L ASME/BPE
 Investment cast 1.4435/ 316 L
 Other alloys
- End connection: Butt weld ends see fold out page 21
 Clamps and flanges see page 22 to 24
 Special ends
- Actuators suitable for: Two-Way bodies
 Welded configurations
 T-bodies
 Multiport bodies
 Tank bottom bodies
- Flow rate: Kv in m³/h (Cv in GPM) see page 9
 Diaphragm size: MA see table below
 Technical data also valid for multiport valve.

DN (mm)	MA	Dimensions (mm)					Total weight ca. (kg)		Filling volume (NL)	
		L	L ₁	H ₁	H ₂	D	Investment cast	Forged	NC	NO/DA
15-25	25	25	120	160	107	95	1,9	2,0	0,17	0,20
32-40	40	25	153	190	129	115	3,9	4,2	0,31	0,34
50	50	30	173	236	171	144	7,0	8,0	0,68	0,80