

SISTO-C Diaphragm valves for sterile applications



Applications:

Hygienic and sterile handling of fluids in the food, beverage and pharmaceutical industries



Further information:

www.sisto-aseptic.com

Your contact:



SISTO-C Diaphragm valves for sterile applications

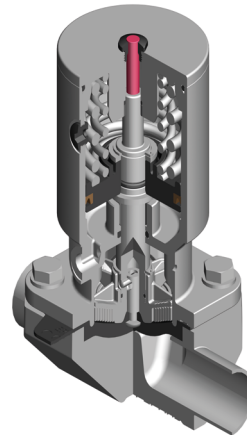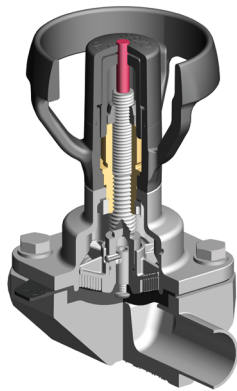

- Maximum service life and pressure limit (PN16)**
 thanks to enclosed and spiral-supported diaphragm;
 operating pressure up to 20bar
- Simplified installation and control of the drain angle**
 Self-drained; drain angle indicated by laser marking
- Optimum conditions for fluid purity**
 due to valve hydraulics without dead volume
- High energy efficiency**
 Lower pressure losses thanks to optimized flow profile

- Excellent functional reliability**
 The floating diaphragm suspension prevents damages of
 the diaphragm
- Reliable operation**
 The stem and all internal operating elements are not in
 contact with the fluid
- Reliable sealing to atmosphere and absolutely
 tight shut-off**
 The diaphragm provides hermetic sealing

Materials

Body	1.4435 ; 1.4539 and different Hastelloy qualities
Bonnet	1.4409
Diaphragm	SISTOaseptiXX EPDM SISTOaseptiXX TFM-bonded SISTOaseptiXX TFM/EPDM 2-piece

SISTO-C Kvs values			DIN 11866 series A	DIN 11866 series B	DIN 11866 series C
DN	NPS	MD	Kvs-value m ³ /h	Kvs-value m ³ /h	Kvs-value m ³ /h
6	1/4"	30	1,1	1,5	0,6
8	5/16"	30	1,8	2,2	-
10	3/8"	30	2,1	-	1,7
15	1/2"	30	-	-	2,1
10	3/8"	40	-	4,5	-
15	1/2"	40	5	5,2	2,6
20	3/4"	40	-	-	4,9
20	3/4"	65	11,8	14,7	-
25	1"	65	16,5	17,5	13,8
32	1 1/4"	92	34	43	-
40	1 1/2"	92	42,5	45,5	39
50	2"	115	65	69	62
65	2 1/2"	115	-	-	71
65	2 1/2"	168	137	149	-
80	3"	168	156	161	151
100	4"	202	245	255	237



SISTO Armaturen S. A. • 18, rue Martin Maas • 6468 Echternach / Luxembourg
 Tel. +352 325085-1 • Fax +352 328956 • Email: info@sisto-aseptic.com • www.sisto-aseptic.com

A KSB Company • KSB



+31 (0)85 043 31 10

info@romynox.nl

www.romynox.nl