

SHORT CONCENTRIC REDUCER C X C*


Hygienic Clamp Joint: Short Concentric Reducer

Due to the manufacturing process, varying face-to-face lengths and exotic material, concentric reducers can also be supplied to suit any customer requirements.



Technical information

Sizes	see table
Connections	Tri-clamp
Material	1.4404 (316L)
Finishes	Interior surfaces < 0,8 Ra
Certificates (st.)	3.1 material
Certificates (opt.)	2.2 surface finish

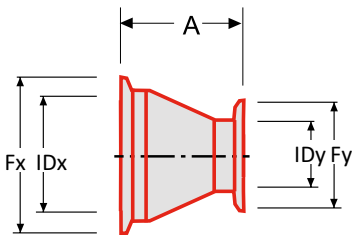

Size	A	ØIDx	ØFx	ØIDy	ØFy
3/4" x 1/2"	40	15.9	25.0	9.5	25.0
1" x 1/2"	50	22.2	50.5	9.5	25.0
1" x 3/4"	50	22.2	50.5	15.8	25.0
1 1/2" x 1/2"	50	34.9	50.5	9.5	25.0
1 1/2" x 3/4"	50	34.9	50.5	15.8	25.0
1 1/2" x 1"	50	34.9	50.5	22.2	50.5
2" x 1/2"	50	47.6	64.0	9.5	25.0
2" x 3/4"	50	47.6	64.0	9.5	25.0
2" x 1"	50	47.6	64.0	22.2	50.5
2" x 1 1/2"	50	47.6	64.0	34.9	50.5
2 1/2" x 1/2"	60	60.3	77.5	9.5	25.0
2 1/2" x 3/4"	60	60.3	77.5	15.8	25.0
2 1/2" x 1"	60	60.3	77.5	22.2	50.5
2 1/2" x 1 1/2"	60	60.3	77.5	34.9	50.5
2 1/2" x 2"	60	60.3	77.5	47.6	64.0
3" x 1/2"	60	73.0	91.0	9.5	25.4
3" x 3/4"	60	73.0	91.0	15.8	25.4
3" x 1"	60	73.0	91.0	22.2	50.5
3" x 1 1/2"	60	73.0	91.0	34.9	50.5
3" x 2"	60	73.0	91.0	47.6	64.0
3" x 2 1/2"	60	73.0	91.0	60.3	77.5

* comply with ASME-BPE, but is not part of the ASME-BPE program.